
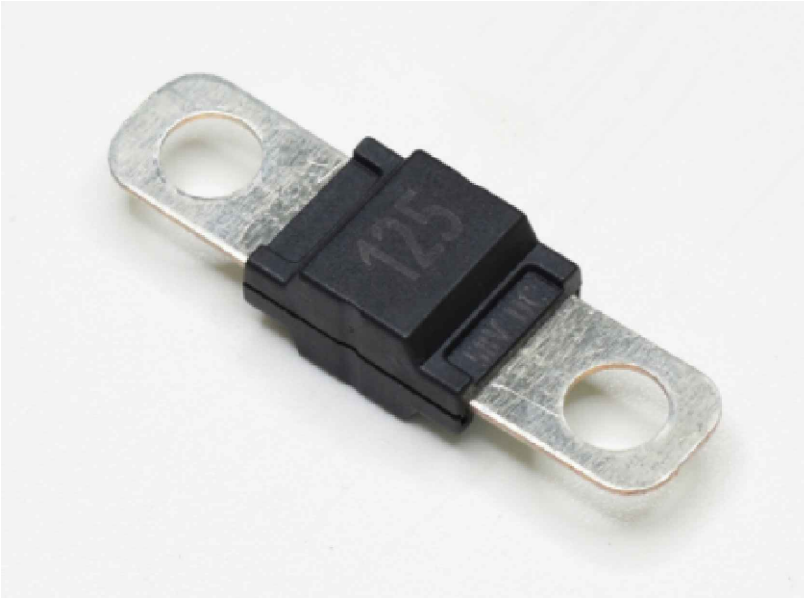


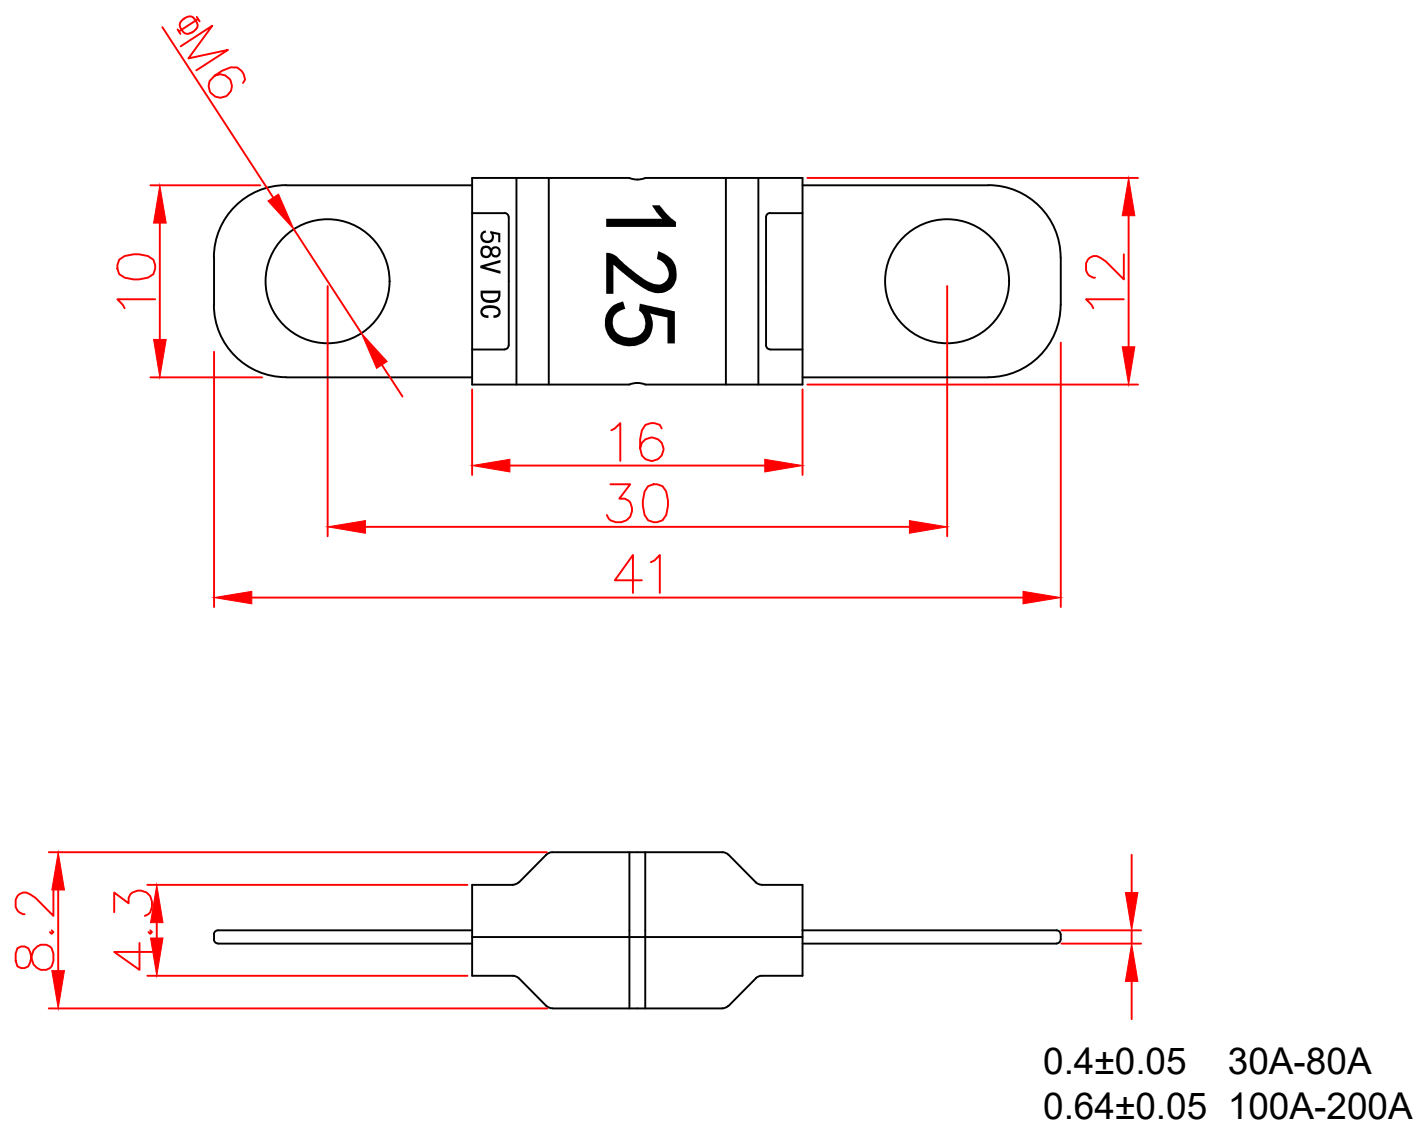

电气参数/SPECIFICATIONS:

AUTO BOLT FUSE

Model:ANS-P

Rated Current: 30 40 50 60 70 80 100 125 150 175 200 (A)

Rated Voltage:58V

Breaking Capacity: 2000A@58VDC

Body: PA66

Metal :Copper Tin Plating

Fit Screw:M6

Complies with:GB/T 31465.5 ISO8820-5

Operating Characteristics		
% of Ampere Rating(In)	Broken Time	
	30A-125A	150A-200A
75%	/	100H Min
100%	100H Min	/
110%	4H Min	/
200%	3s-100s	3s-15s
300%	0.3s-3s	/
350%	/	0.3-5s
500%	0.1-1S	/
600%	/	0.1-1s

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X±1 0.X±0.5 ±2° 0.XX±0.05 DO NOT SCALE DRAWING		CUSTOMER NO.	东莞市云恬电子科技有限公司 Dongguan YTIM Electronic Technology Co., Ltd. TITLE BOLT FUSE PART NO. ANS-P DRAWING NO. YTIMLINKS2025
		DRAWN BY TIM.YU	
		CHECKED BY	
		APPROVED BY sophie	
		DATE 2024-01-05	
P/N		SCALE	
REV	A		