
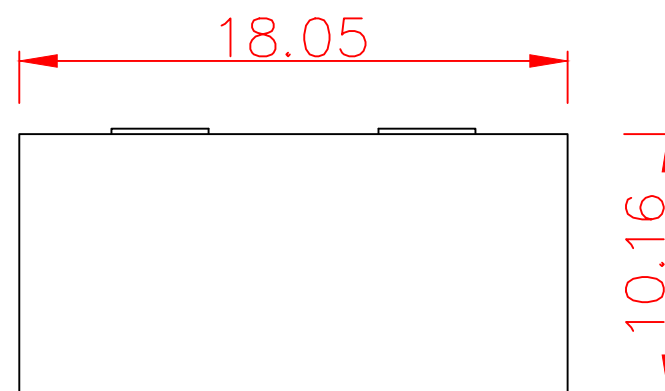
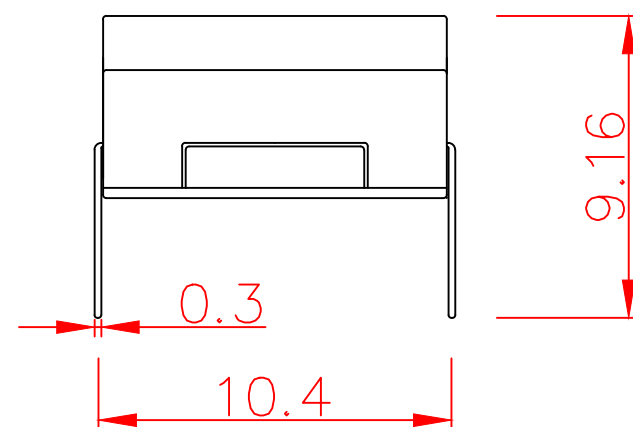
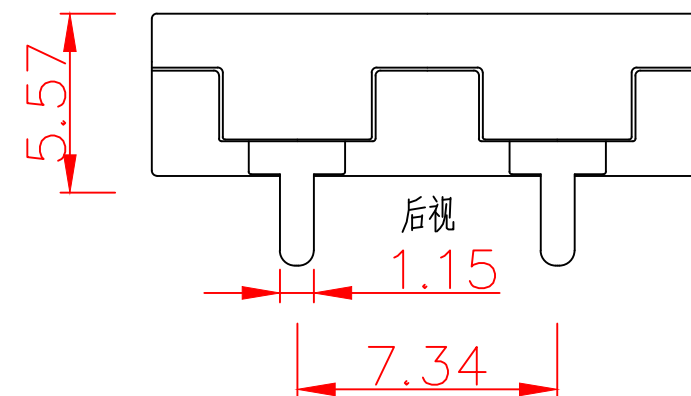


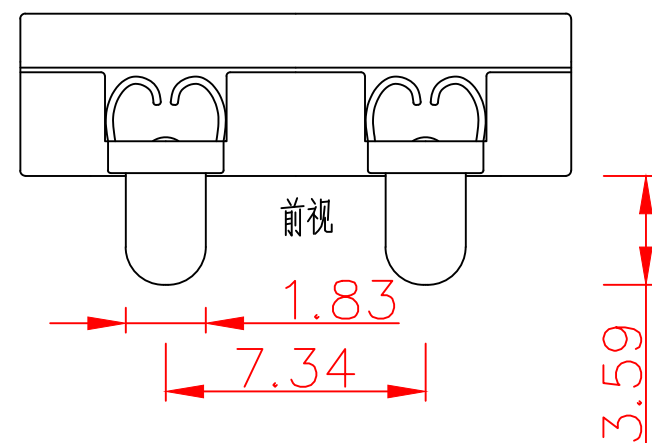

电气参数/SPECIFICATIONS:

BLADE FUSE BLOCK

Model: BH-102

FUSE: ATS/298/ATN

Electrical: Max. 30A 32VDC

Insulation Resistance at 32VDC: Min. 100MΩ

Insulating Body: PBT

Contact Resistance: Max. 50mΩ

Operating Temperature Range: -40°C + 125°C

Terminal: T=0.3mm/Brass Tin Plating

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X±0.5 ±2° XX±0.05 DO NOT SCALE DRAWING		CUSTOMER NO.	东莞市云恬电子科技有限公司
		DRAWN BY TIM.YU	Dongguan YTIM Electronic Technology Co., Ltd.
		CHECKED BY	TITLE
		APPROVED BY sophie	FUSE BLOCK 保险丝座
P/N		DATE 2022-01-05	PART NO. BH-102
REV	A	SCALE	DRAWING NO. YTIMLINKS