
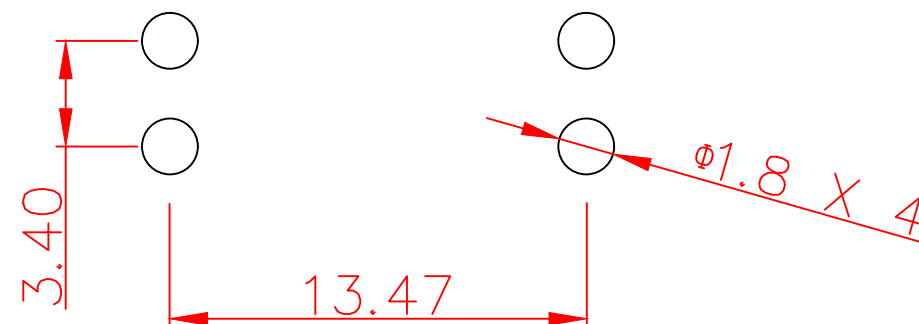
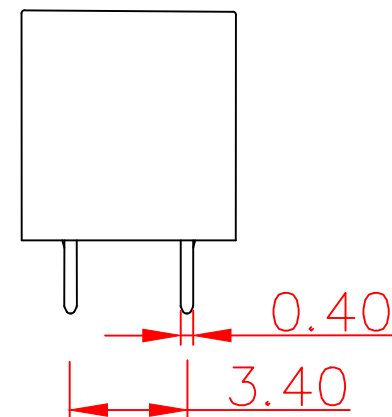
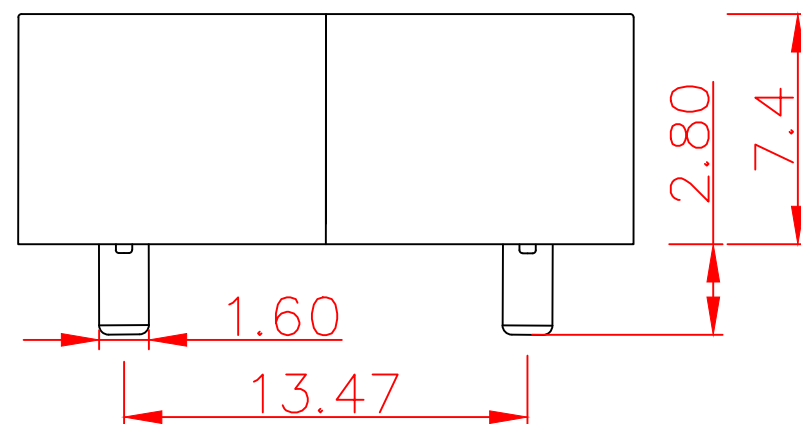


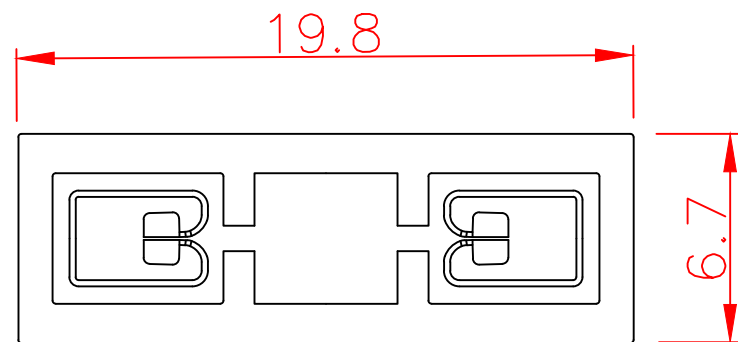

电气参数/SPECIFICATIONS:

BLADE FUSE BLOCK

Model: BH-2508

FUSE: ATC/287/ATS

Electrical: Max. 30A 58VDC

Insulation Resistance at 58VDC: Min. 100MΩ

Insulating Body: PA66

Contact Resistance: Max. 50mΩ

Terminal: T=0.4mm/Brass Tin Plating

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X±0.5 ±2° XX±0.05 DO NOT SCALE DRAWING		CUSTOMER NO.	东莞市云恬电子科技有限公司
		DRAWN BY TIM.YU	Dongguan YTIM Electronic Technology Co., Ltd.
		CHECKED BY	TITLE FUSE BLOCK 保险丝座
		APPROVED BY sophie	PART NO. BH-2508
P/N		DATE 2025-11-18	DRAWING NO. YTIMLINKS2025
REV	A	SCALE	