
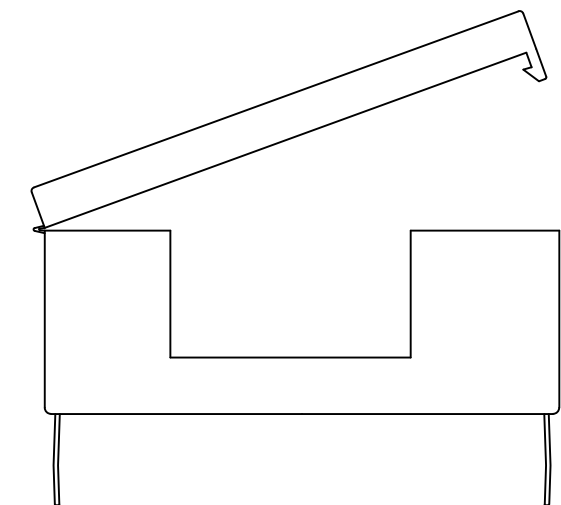
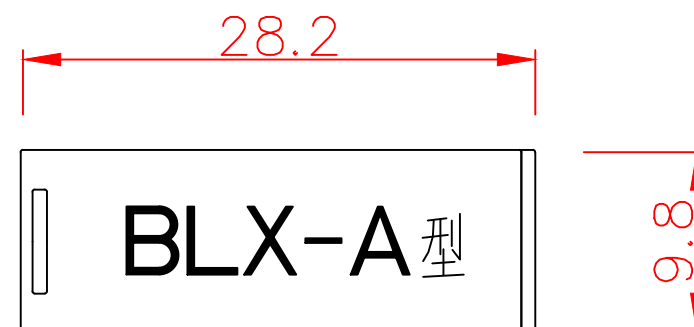
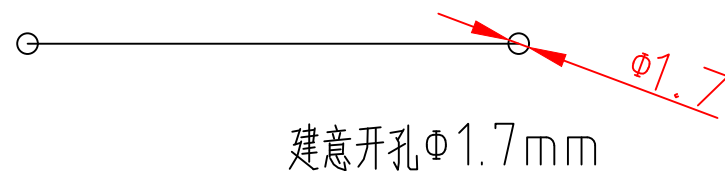
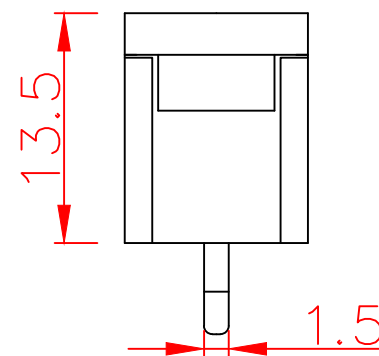


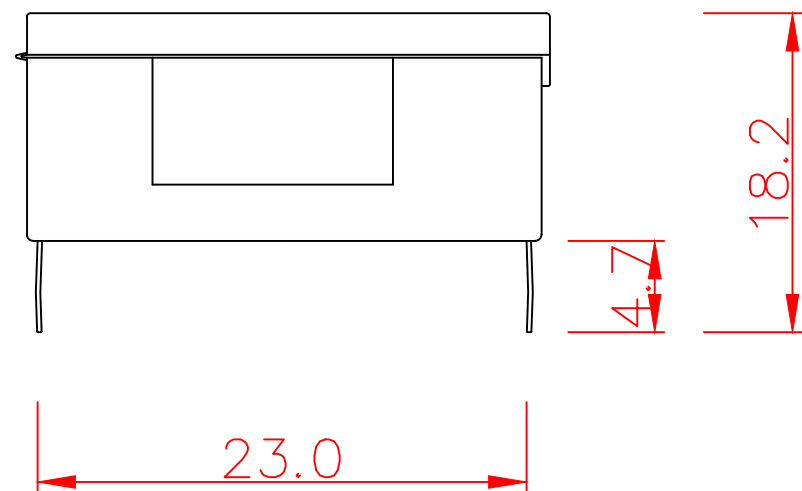

电气参数/SPECIFICATIONS:

5*20mm FUSE BLOCK

Model:BLX-A

FUSE:5*20mm

Electrical: Max.6.3250VAC

Insulating Boby: PA / H62

Insulation Resistance at 250VAC:Min.100M Ω

Operating Temperature: -30 to 105 $^{\circ}\text{C}$

Safety certification: ROHS

Terminal: T=0.35mm/Brass Tin Plating

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X $\pm$ 1 0.X $\pm$ 0.5 $\pm$ 2 $^{\circ}$ 0.XX $\pm$ 0.05 DO NOT SCALE DRAWING		CUSTOMER NO.	东莞市云恬电子科技有限公司
		DRAWN BY TIM.YU	Dongguan YTIM Electronic Technology Co., Ltd.
		CHECKED BY	TITLE FUSE BLOCK 保险丝座
		APPROVED BY sophie	PART NO. BLX-A
P/N		DATE 2022-01-05	DRAWING NO. YTIMLINKS
REV	A	SCALE	